

LE1200 MODULAR LINE AMPLIFIER FOR DOCSIS 3.1 NETWORKS



- Downstream frequency range up to 1218 MHz
- Upstream frequency range up to 204 MHz
- Optional connection to Monitoring System
- GaN output stage
- Automatic gain and slope control
- Automatic ingress management by the RSW module

GENERAL DESCRIPTION

The LE1200 line amplifier thanks to its modular style and to the 3 different gain values can be adapted to each CATV network. The automatic controlled return path ingress switch, the dividable high level output, the module defined breakpoint frequency and the optional AGC unit as well as the exchangeable tray make the device the best choice for HFC solutions.

TECHNICAL SPECIFICATIONS

Forward path RF parameters

	LE1240D	LE1244D	LE1252D
Amplifier type	GaN PD hybrid		
Gain [dB]	40±1	44±1	52±1
Frequency range [MHz]	47...1218 ⁽¹⁾		
Equaliser breakpoint frequency [MHz]	862, 1006, 1218 ⁽²⁾		
RF attenuator range [dB]	0...22 ⁽³⁾		
RF equaliser range [dB]	0...18 ⁽⁴⁾		
Flatness [dB]	±0.75		
Return loss (40MHz -1.5dB/octave) [dB]	>18		
RF testpoint attenuation [dB]	30±1		
CTB [dB]	-80 ⁽⁵⁾		
CSO [dB]	-80 ⁽⁵⁾		
Noise-to-power ratio (NPR) maximum / Dynamic range of NPR > 42 [dB]	60 / 25 ^{(6) (7)}		
ASG insertion loss (20°C) [dB]	6.5		
ASG control range [dB]	±4		
ASG flatness [dB]	±0.5		
Noise figure [dB]	7		
Output splitter, directional coupler [dB]	Plug-in 4, 8, 12, 16, 20		

Specifications are subject to change without notice!

Reverse path RF parameters

	LE12xxD-xx-20	LE12xxD-xx-25
Gain [dB]	20±1	25±1
Frequency range [MHz]		5...204
Diplex filter [MHz]		65/85, 85/105, 204/258
RF attenuator range [dB]		0...22 ⁽³⁾
RF equaliser range [dB]		0...14 ^{(3) (8)}
Flatness [dB]		±0.75
Input return loss (40MHz -1.5dB/octave) [dB]		>18
RF testpoint attenuation [dB]		30±1
Ingress control switch (RSW) states		0dB/-6dB/-50dB, 0dB/-6dB/-50dB/HPF20
Noise-to-power ratio (NPR) maximum / Dynamic range of NPR > 36 [dB]		57 / 27 ^{(9) (10)}


General parameters

RF connector	5/8"
Power supply voltage [VAC]	~ 30..65, □ 35...90
Maximum power consumption [W]	25
Maximum current feed-through [A]	10
Hum modulation [dB]	70
Screening factor [dB]	80
Degree of protection	IP65
Operational temperature range [°C]	-40...+60
Dimensions [mm]	275x200x122
Weight [kg]	4.1

- (1) Lower frequency limit is defined by the diplexer
- (2) Breakpoint is defined by the mounted equaliser modules
- (3) 2 dB steps (in case of attenuators 1 dB steps are possible between 0 dB and 5 dB)
- (4) 2 dB steps. In case of breakpoint of 1006 MHz and 1218 MHz the range is limited at 16 dB
- (5) 60 dBmV at 1218 MHz, 22 dB extrapolated tilt, 79 analog + 111 digital channels (-6 dB offset)
- (6) Measured with flat full spectrum load between 85 and 1218 MHz
- (7) NPR_{max} at TCP = 65 dBmV
- (8) In case of breakpoint of 65 MHz and 85 MHz the range is limited at 12 dB
- (9) Measured with flat full spectrum load between 5 and 204 MHz
- (7) NPR_{max} at 39 dBmV/channel

Specifications are subject to change without notice!

BLOCK DIAGRAM

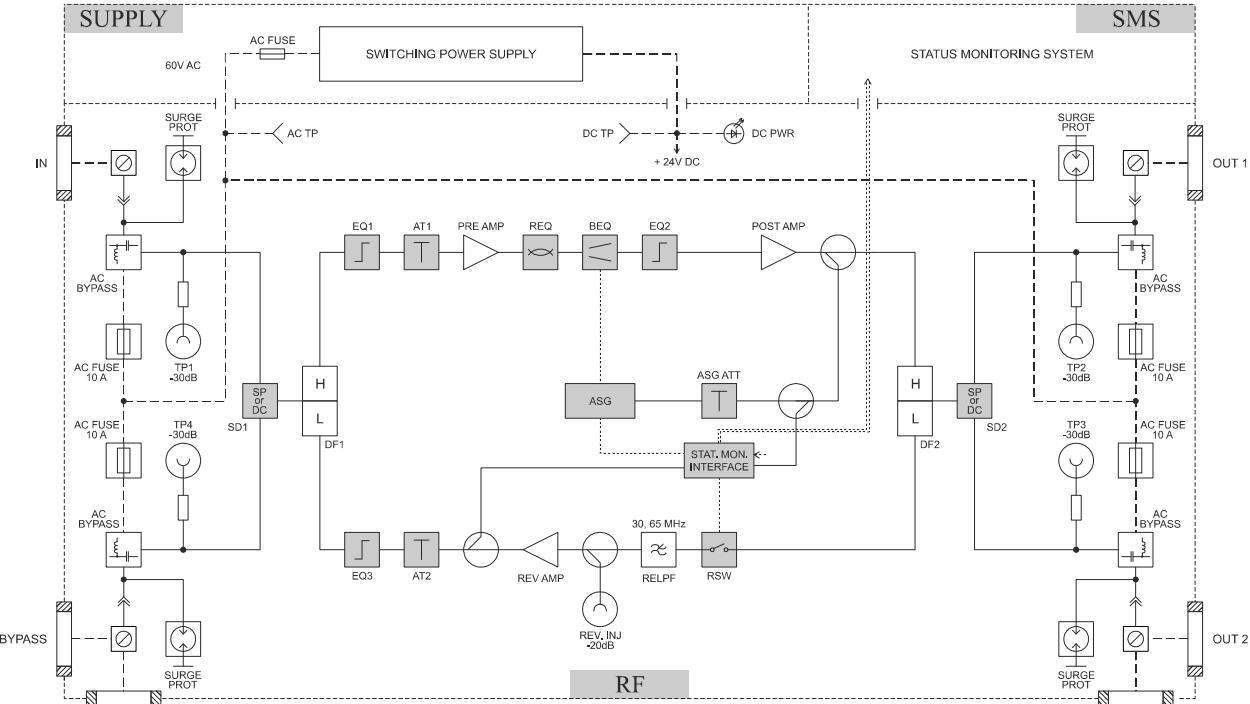

Specifications are subject to change without notice!

ORDERING INFORMATION _____

L E 1 2 X X D - X X - X X

Forward path gain

40	Typically 40 dB
44	Typically 44 dB
52	Typically 52 dB

Type of the diplex filter

65	Pluggable 65/85MHz diplex filter
85	Pluggable 85/105MHz diplex filter
204	Pluggable 204/258MHz diplex filter

Reverse path gain

20	20 dB
25	25 dB

Option	Required modules	Ordering codes
ASG option	1pc ASGxxx-C, 1pc BEQxxx-A, 1pc ATxx	ASGxxx-C, BEQxxx-A, ATxx
Monitoring option	1pc NMT-FE, 1pc RSW2-A or 1pc RSW2-H20	NMT-FE, RSW-2A, RSW2-H20
Wall mount kit	1pc WMK-1 (double)	WMK-1

Specifications are subject to change without notice!